



## MOVING COIL SINGLE DRIVER


---



**MC-8**  
CUSTOM MADE



**MC-8U**  
UNIVERSAL

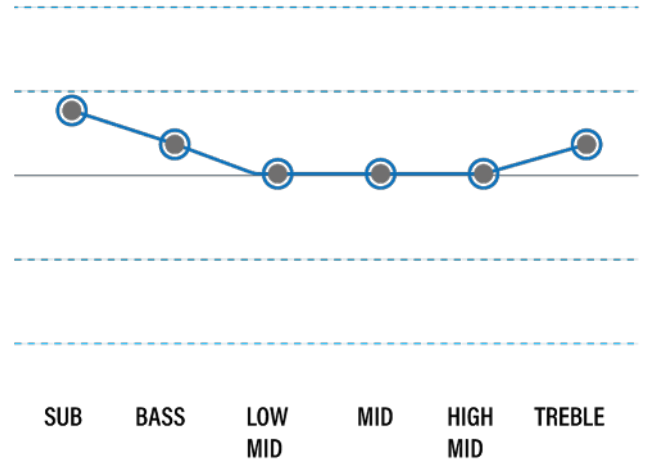

### Internal Speaker Configuration

Single moving coil Driver

### Frequency Response

10Hz – 16kHz

### Input Sensitivity

109dB @ 1kHz, 1mW

### Impedance

16 Ohms

### Noise Isolation

-23dB of ambient stage noise

### Taste

Warm, sounds like a large Hifi speaker

### Lows

Extended sub-bass

### Mid

Present but not forwarded

### Highs

Natural with a good extension

---

•BASS PLAYER  
•DRUMMER  
•KEYBOARD