For an optimal audio performance, your ear must be blocked by the eartip without any leakage.

Select the size that provide you the best comfort and fit.

We recommand to try all three sizes and be aware you may need a different size for each ear.











SAVE YOUR HEARING










IDENTIFY YOUR IEM


1. Reduce the volume

2. Wear your IEM

3. Increase the volume

4. Enjoy your music

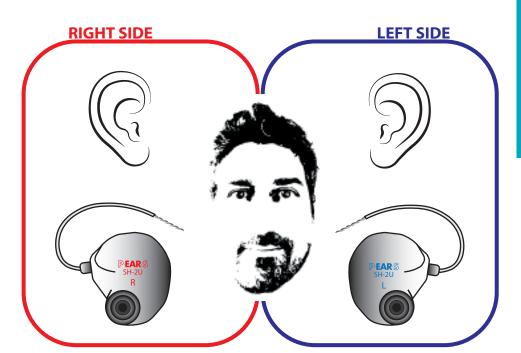

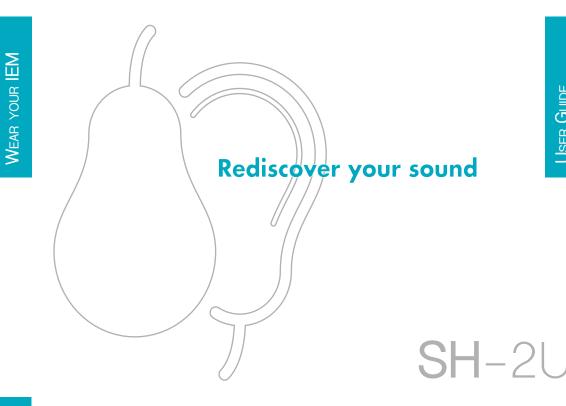

#bearsaudio # keqiscoveryoursound

Obestagnatio apske your experience

SWISS MADE IN-EAR MONITORS










Accessories

Extend the life and reliability of your monitors by cleaning after every use. No need to disconnect the audio cable.

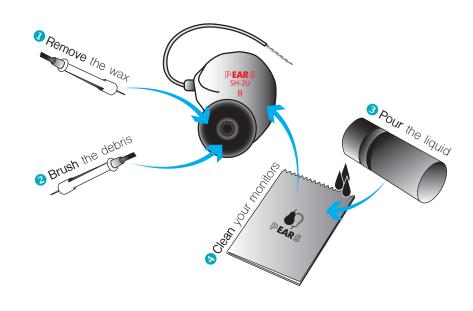

Internal Speaker Configuration

Dual Driver single mid-low/single high 1 passive crossover

Frequency Response

10Hz - 17kHz

Input Sensitivity


113dB @ 1kHz, 1mW

Impedance

56 Ohms

Noise Isolation

-26dB of ambient stage noise



SH-2U