


DUAL DRIVER



SH-2
CUSTOM MADE



SH-2U
UNIVERSAL

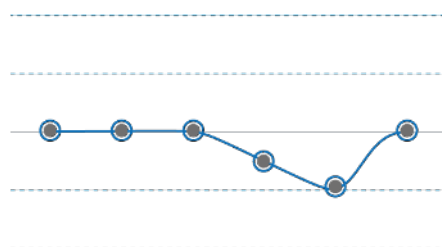

SUB BASS LOW MID MID HIGH MID TREBLE

Internal Speaker Configuration

Dual Driver single
mid-low/single high
1 passive crossover

Frequency Response

10Hz - 17kHz

Input Sensitivity

113dB @ 1kHz, 1mW

Impedance

56 Ohms

Noise Isolation

-26dB of ambient stage noise

Taste

Warm, sounds like a good bookshelf speaker

Lows

Warm

Mid

Present, but not forwarded

Highs

Natural with a good extension

- BASS PLAYER
- DRUMMER
- KEYBOARD
- SOUND ENGINEER
- AUDIOPHILE


TRIPLE DRIVER



SH-3
CUSTOM MADE



SH-3U
UNIVERSAL

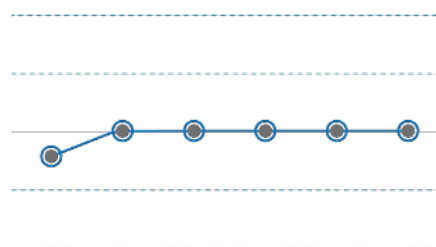

SUB BASS LOW MID MID HIGH MID TREBLE

Internal Speaker Configuration

Triple Driver dual
mid-low/single high
1 passive crossover

Frequency Response

10Hz - 18kHz

Input Sensitivity

117dB @ 1kHz, 1mW

Impedance

25 Ohms

Noise Isolation

-26dB of ambient stage noise

Taste

Neutral and detailed, sounds like a transparent studio monitor speaker

Lows

Fast

Mid

Clear, natural

Highs

Crystal clear with a good extension

- SINGER / VOCAL
- GUITAR PLAYER
- DRUMMER
- KEYBOARD
- SOUND ENGINEER
- AUDIOPHILE